


# > R10

## Regolatore di velocità elettronico monofase incassabile 1 A

Single-phase electronic speed regulator 1 A

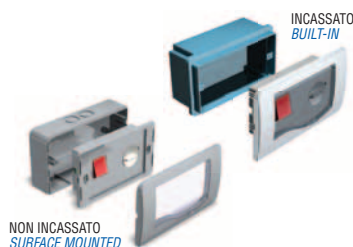

### DESCRIZIONE

Variatore di tensione manuale a regolazione continua tramite potenziometro. Adatto a motori asincroni monofase regolabili.

### CONSTRUZIONE

- Nuovo design con sportellino apribile
- Regolazione di tipo continuo tramite potenziometro
- Interruttore ON/OFF di tipo luminoso
- INCASSABILE nelle tradizionali scatole a 4 moduli
- Morsettiera estraibile per cablaggio veloce
- Trimmer di taratura minima velocità
- Fusibile di protezione
- Alimentazione monofase 230V - 1Ph - 50/60 Hz
- Corrente nominale max. 1 A
- Grado di protezione IP42
- Peso 0,5 Kg
- Dimensioni 110 x 80 x 42
- Marcatura CE

### DESCRIPTION

Manual voltage converter with continuous regulation by potentiometer. Suitable for single-phase asynchronous adjustable motor.


### CONSTRUCTION

- Infinitely variable electronic speed controller by potentiometer
- New design with cover
- ON/OFF light switch
- Suitable for surface and built-in application
- Ease of connection by the means of removable terminals
- External trimmer for the adjustment of the fan minimum speed
- Protection fuse
- Single-phase 230V - 50/60 hZ
- Max. load 1 A
- Protection IP42
- Weight 0,5 Kg
- Dimensions 110x80x42
- CE marked

## DIMENSIONI E SCHEDA DI COLLEGAMENTO *Dimensions and wiring diagram*

R10

Dimensioni in mm / Dimensions in mm

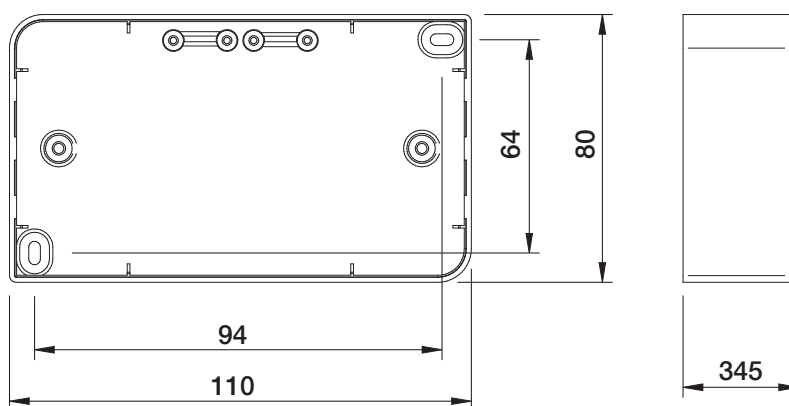

R10

